Premium

RF Technology

The Premium RF combines design and functionality. Both highly aesthentic and highly functional its slim and descrete design provides a excellent choice for any retail store.

The metal framed Premium standard colors are high gloss black or grey/silver. Although, it can be custom ordered in any color to compliment the ambience of your store.

It's superb detection range combined with high tech add-ons such as integrated metal detection makes it a top choice on the EAS market.

ADD-ONS

- Metal Detection (MDG)
- Integrated People Counting (PC)
- Ad-holder
- Remote Service

RF

PRODUCT SHEET - PREMIUM

GUNNEBO GATEWAY
www.gunnebogateway.com

Premium MDG

RF Technology

The metal detection function (MDG) add-on is built in and silently alarms when metal foiled bags used during shoplifting pass through the systems.

RF

EXTERNAL MDG ALARM LIGHT
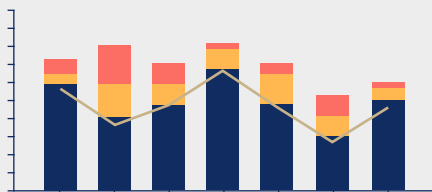

PAGER & TRANSMITTER

AIR LINK INTERFACE

i **Premium MDG + PC**
The Premium antenna can simultaneously have both Metal Detection and People counting as add-ons.

GUNNEBO GATEWAY
www.gunnebogateway.com

Premium PC

RF Technology

The integrated people counting function (PC) add-on counts the number of people entering your store providing you with valuable data.

RF

DATA
ANALYTICS

REMOTE SERVICE
CONTROLLER

ⓘ **Premium MDG + PC**
The Premium antenna can simultaneously have both Metal Detection and People counting as add-ons.

Specifications

Measurements

Width .... 303 mm
Height ....1546 mm
Thickness .... 50 mm
Thickness at base .... 54 mm
Weight .... (8 kg / antenna) 16 kg

Power Consumption

2 Antennas Rx/Tx .. 23 W , MDG +6,2 W , PC +3 W
3 Antennas Rx/Tx .. 26 W, MDG +9 W , PC + 4,6 W

Power Supply AC/DC
Input 100-240VAC, 50/60Hz
Output 24Vdc

Features

Swept RF system
Swedish design
Suitable for wide entrances
Standard colors Silver or Black

Working Frequency

RF Center Frequency 8.2MHz
RF Frequency band of operation 7.7-8.7MHz

Add-ons

Remote service v3
Colored sheets
AD-Holder
Protection buffers
Customized printed sheets

Environmental

Ambient Temperature * .... 0°C to 50°C
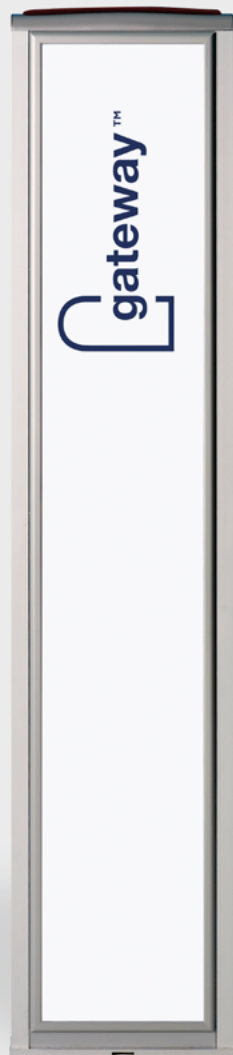Relative Humidity .... 0 to 90%

* 32°F to > 122°F

Alarm

Audio level (adjustable) 95dBA

Approvals

CE, CB

ADD-ON

AD-HOLDER

GUNNEBO GATEWAY
www.gunnebogateway.com

Dimensions

Premium