



01 Installation Guide – Vertical Display

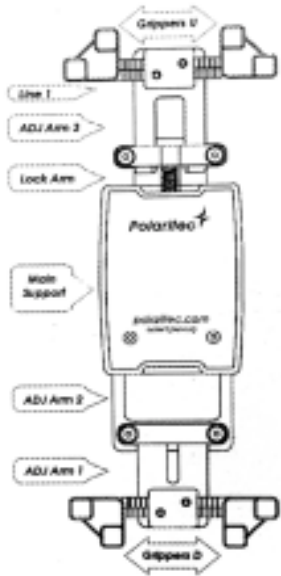

- Use phone as example:
- 1, Centre the phone on the **Main Support** vertically. Grip the phone in width with **Grippers D**, screw down the D Grippers here. Adjust **Grippers U** to have same tick marks as **Grippers D**, screw down U Grippers here.
 - 2, Centre the phone on the **Main Support** vertically. Adjust **ADJ Arms 1 & 2** to hold the phone from bottom, screw down the Arms 1&2 here.
 - 3, When phone is well held from bottom, keep the **Lock Arm** in its longest extension and pull the **ADJ Arm 3** away from phone, stop pulling when the gap between Line 1 and the upper edge of phone is 1mm, Screw down **ADJ Arm 3** here.
 - 4, **Push Grippers U** downward, phone will be well locked after a "click" sound.
 - 5, Hook up the OEM charging cable coming from the base of PL-HISEC, your phone is ready to show!

02 Installation Guide – Horizontal Display

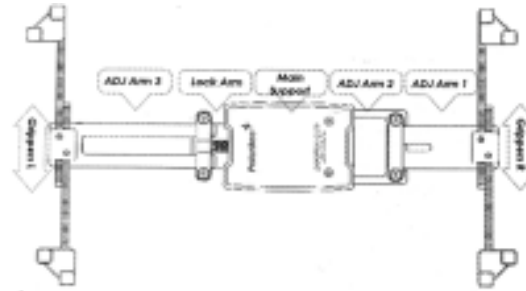


- Use tablet as example:
- 1, Centre the tablet on the **Main Support** horizontally. Grip the tablet in width with **Grippers R**, screw down the R Grippers here. Adjust **Grippers L** to have same tick marks as **Grippers R**, screw down L Grippers here.
 - 2, Centre the tablet on the **Main Support** horizontally. Adjust **ADJ Arms 1&2** to hold the tablet from right side, screw down the Arms 1&2 here.
 - 3, When tablet is well held from right, keep the **Lock Arm** in its longest extension and pull the **ADJ Arm 3** away from tablet, stop pulling when the gap between **Line 1** and the left edge of tablet is 1mm, Screw down **ADJ Arm 3** here.
 - 4, Push **Grippers L** rightward, tablet will be well locked after a "click" sound.
 - 5, Hook up the OEM charging cable coming from the base of PL-HISEC, your tablet is ready to show!

03 Mounting Guide


(3) Options to mount PL-HISEC to a surface with the supplied mounting kits. Support both flat surface mounting and wall mounting.

Option 1, Mount the stand from top of the counter or surface with (4) M4 screws.


Option 2, Secure PL-HISEC with the (2) mounting threads and wing nuts from bottom of the surface




Note: Supplied 50mm threaded rods will fit a maximum counter depth of 35mm.



Mount Outlines




Option 3, or as an add-on security, Stick the stand on to the surface with supplied 3M adhesives.



Mount Outlines
A. M4 screw holes
B. Mounting threads holes
C. Cable pass through hole

04 Quick Release

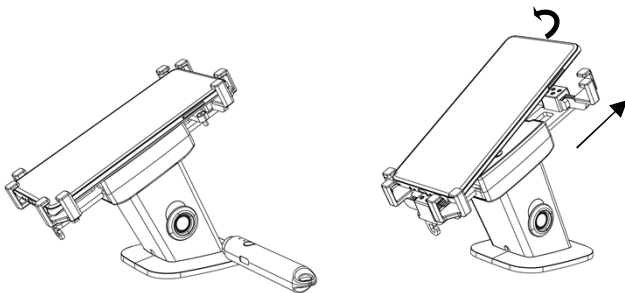

Plug Key into the key port in the post. In 2~3 seconds the Lock arm shall popup and release the phone/tablet along with the LEDs blinking on post and key.


Note:
If pull the key out of the port before the lock arm popup, or a low-power battery makes the lock arm fail to popup, then you may need to plug in the right key twice to complete the releasing process.

05 Packing

PL-HISEC Phone	Carton Qty: 8 sets
Post with Phone Grippers and Arms	*1
Installation & Maintenance Kit	Allen key, Screw for Arm*2, Screw for Grippers*2
Mounting Kit	3M adhesive*1 set, mounting screw*4, mounting threaded rod*2, wing nut *2
PL-HISEC Tablet	Carton Qty: 8 sets
Post with Tablet Arms	*1
Tablet Grippers	*1 set
Installation & Maintenance Kit	Allen key, Screw for Arm*2, Screw for Grippers*2
Mounting Kit	3M adhesive*1 set, mounting screw*4, mounting threaded rod*2, wing nut *2

Polaritec

PL-HISEC
High Security Phone & Tablet Display

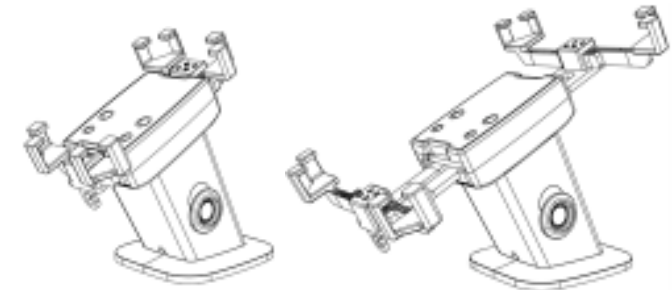

Secure Phones

Width: 56-96mm
Length: 114-172mm

Secure Tablets

Width: 103-196mm
Length: 162-240mm